
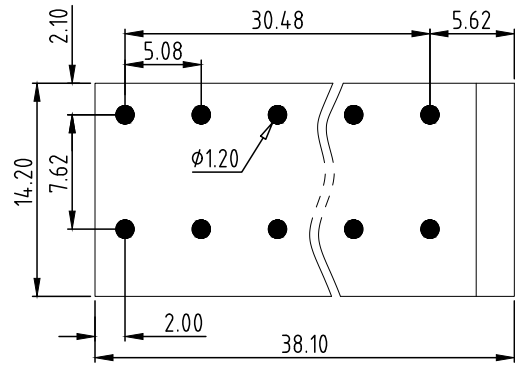





2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11

Electrical :

- | | | |
|---|---|------------------------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 250V |
| 2.Rated Current : | 10A | 15A |
| 3.Wire Range: | 22-16AWG | 0.2-1.5mm ² |
| 4.Stripping Length : | 10-11mm | |
| 5.Withstanding Voltage : | AC2000V/1Min. | |
| 6.Operating Temperature : | -40°C~+105°C | |
| 7.RoHS Compliance | | |
| 8.Safty Approval : |  | |
| 9. " ★ " is the key quality control point | | |

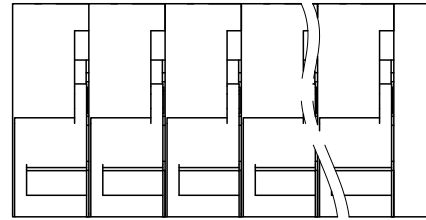

● FOR PIN
P.C.B LAYOUT

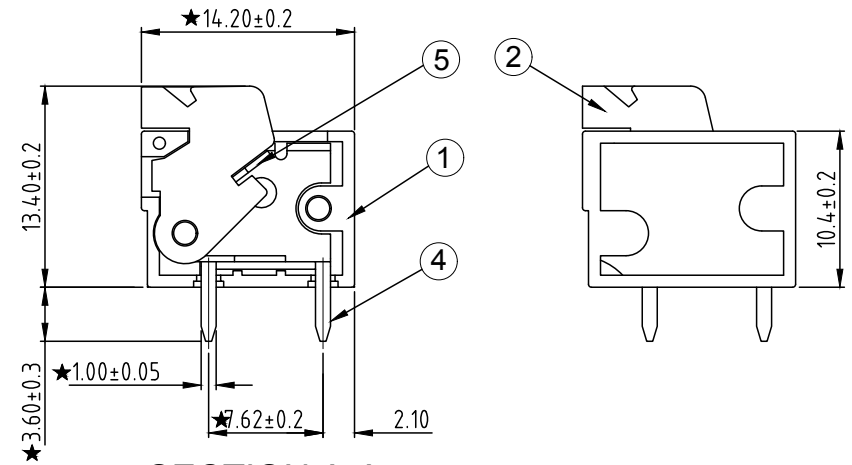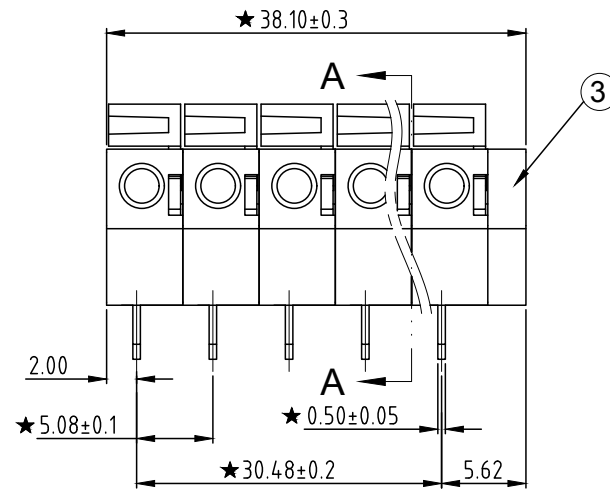

SECTION A-A

5	SPRING COIL		XXXXXX		P	STAINLESS				
4	SOLDER PIN		XXXXXX		P	BRASS			Sn Plated	
3	END COVER		XXXXXX		1	PA66(UL94V-0)			GREEN	
2	LEVER		XXXXXX		P	POM-V2			ORANGE	
1	HOUSING		XXXXXX		P	PA66(UL94V-0)			GREEN	
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE	
DWG.	COL	DATE	20.05.11		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.			DATE		SCALE	1:1				
APP.			DATE		NAME	GT142R-5.08-XXP-XX-00				
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					DWGNO.	XXXX				

A	Total Pitch Tolerances in mm									Nominal dimension range in mm								$\perp$		$\equiv$	$-$		$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 100		to 100	to 150	
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3		0.3	0.2	0.3