


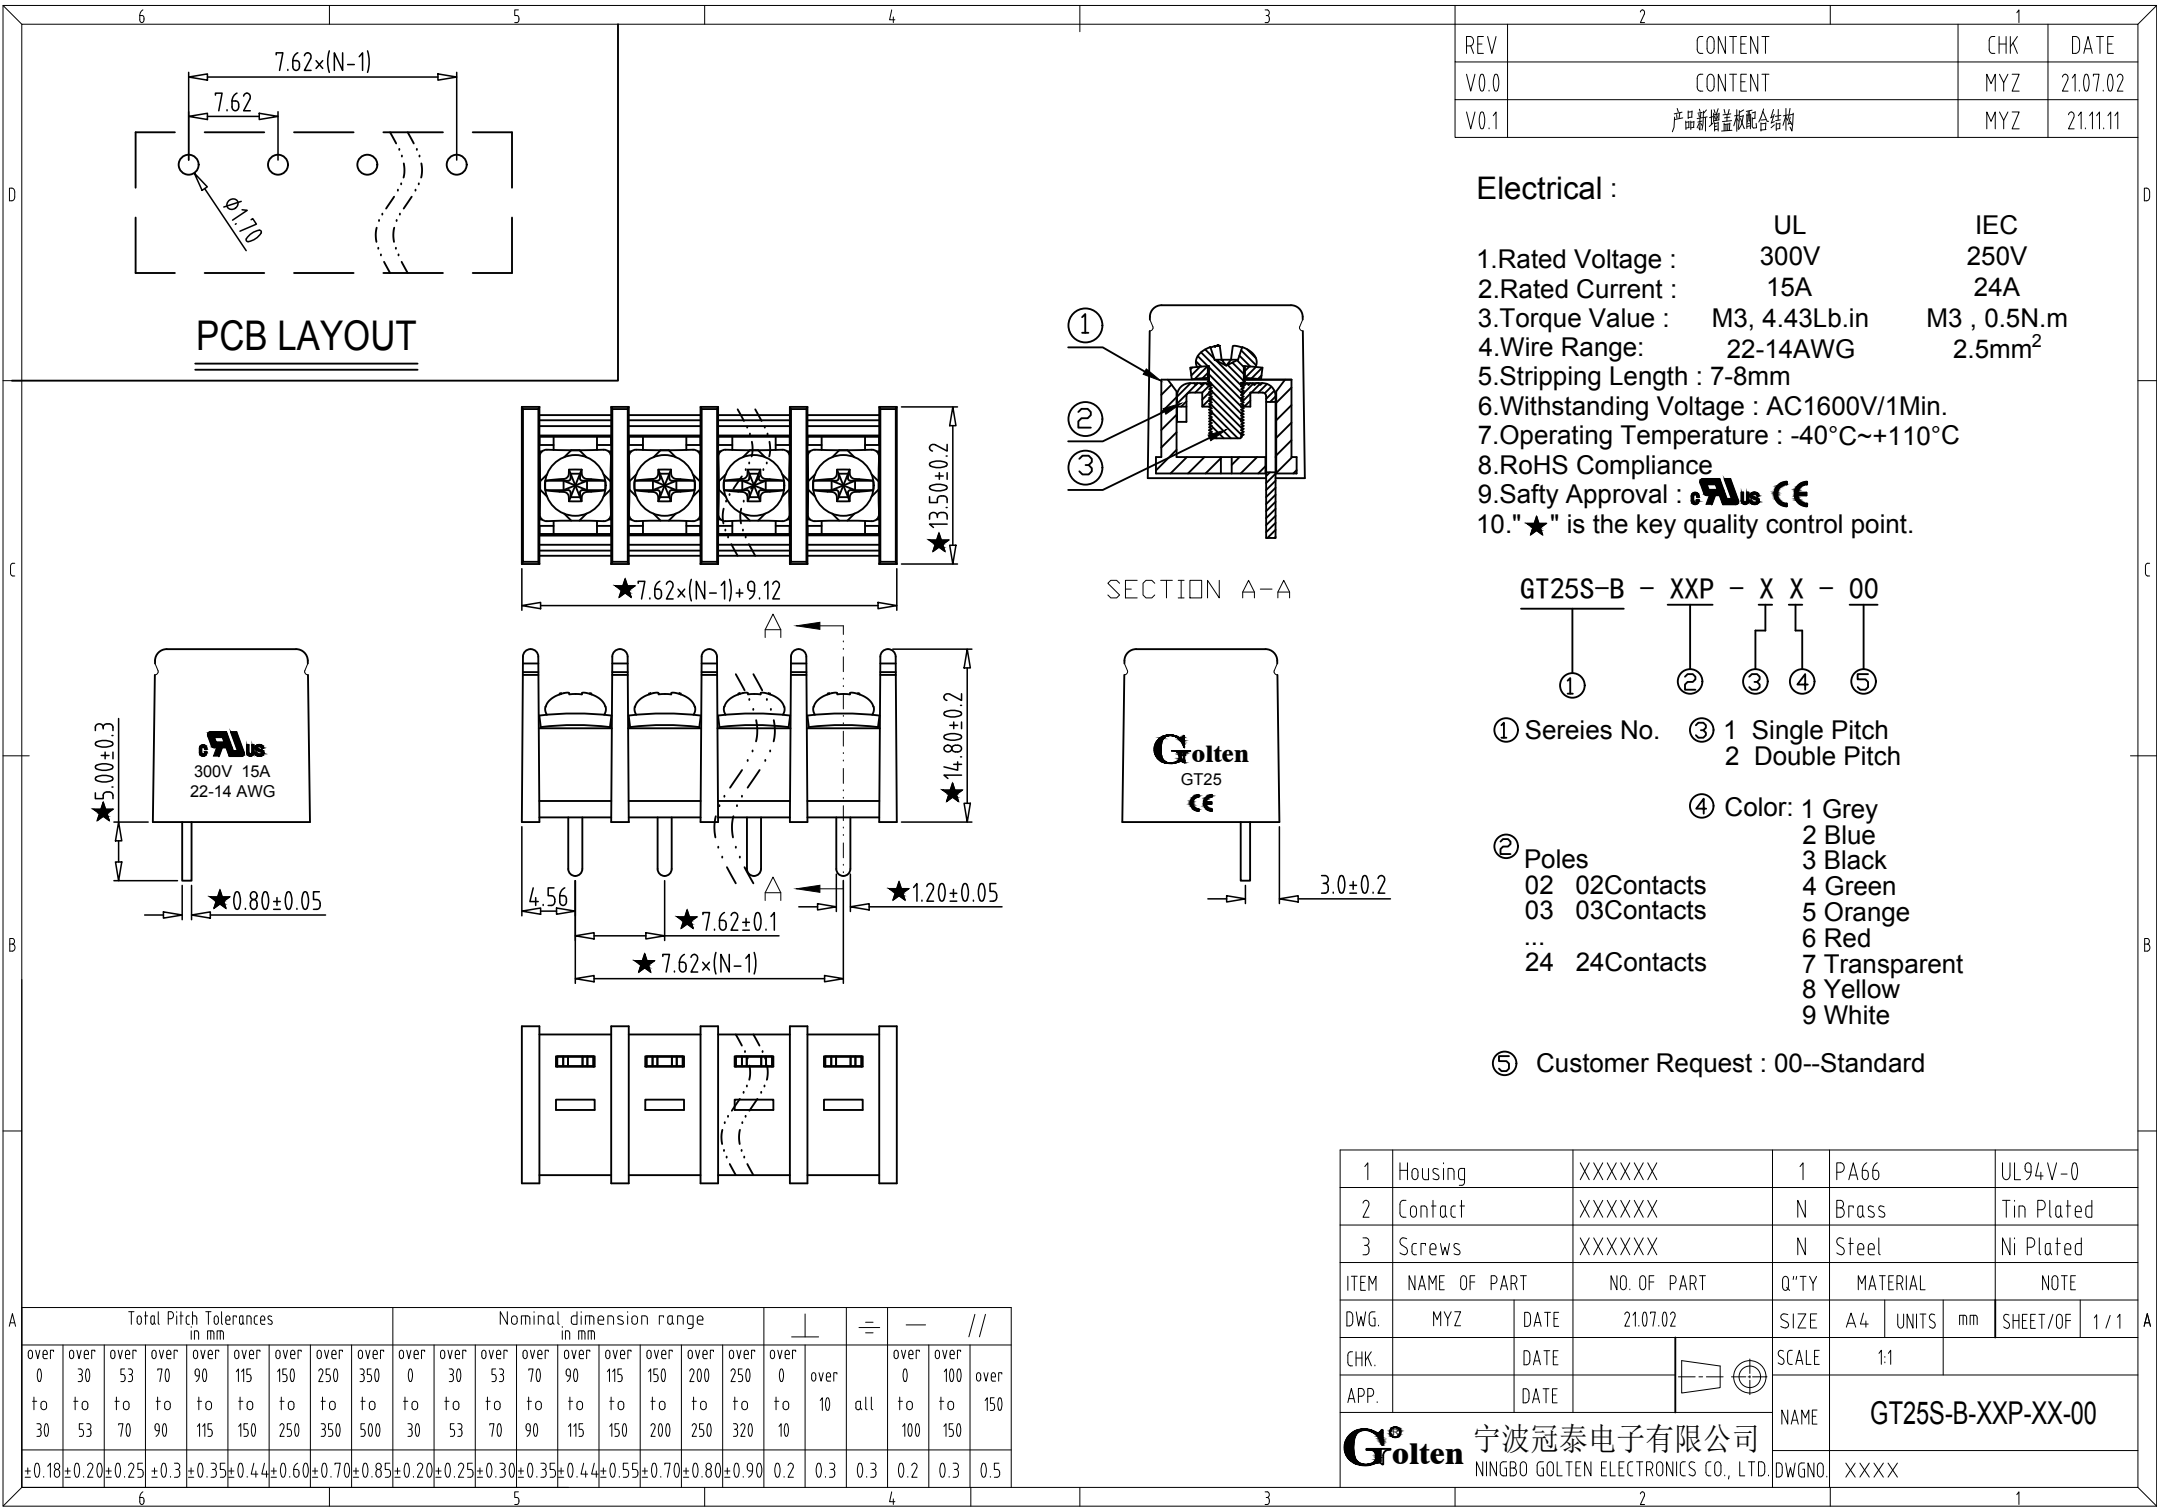

REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.02
V0.1	产品新增盖板配合结构	MYZ	21.11.11

Electrical :

- 1.Rated Voltage : 300V
- 2.Rated Current : 15A
- 3.Torque Value : M3, 4.43Lb.in
- 4.Wire Range: 22-14AWG
- 5.Stripping Length : 7-8mm
- 6.Withstanding Voltage : AC1600V/1Min.
- 7.Operating Temperature : -40°C~+110°C
- 8.RoHS Compliance
- 9.Safety Approval :
- 10."★" is the key quality control point.

GT25S-B - XXP - X X - 00

- ① Series No.
- ② Poles
- ③ 1 Single Pitch
2 Double Pitch
- ④ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑤ Customer Request : 00--Standard

1	Housing	XXXXXX	1	PA66	UL94V-0
2	Contact	XXXXXX	N	Brass	Tin Plated
3	Screws	XXXXXX	N	Steel	Ni Plated
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.07.02	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE				
NAME			GT25S-B-XXP-XX-00		
DWGNO.			XXXXX		