


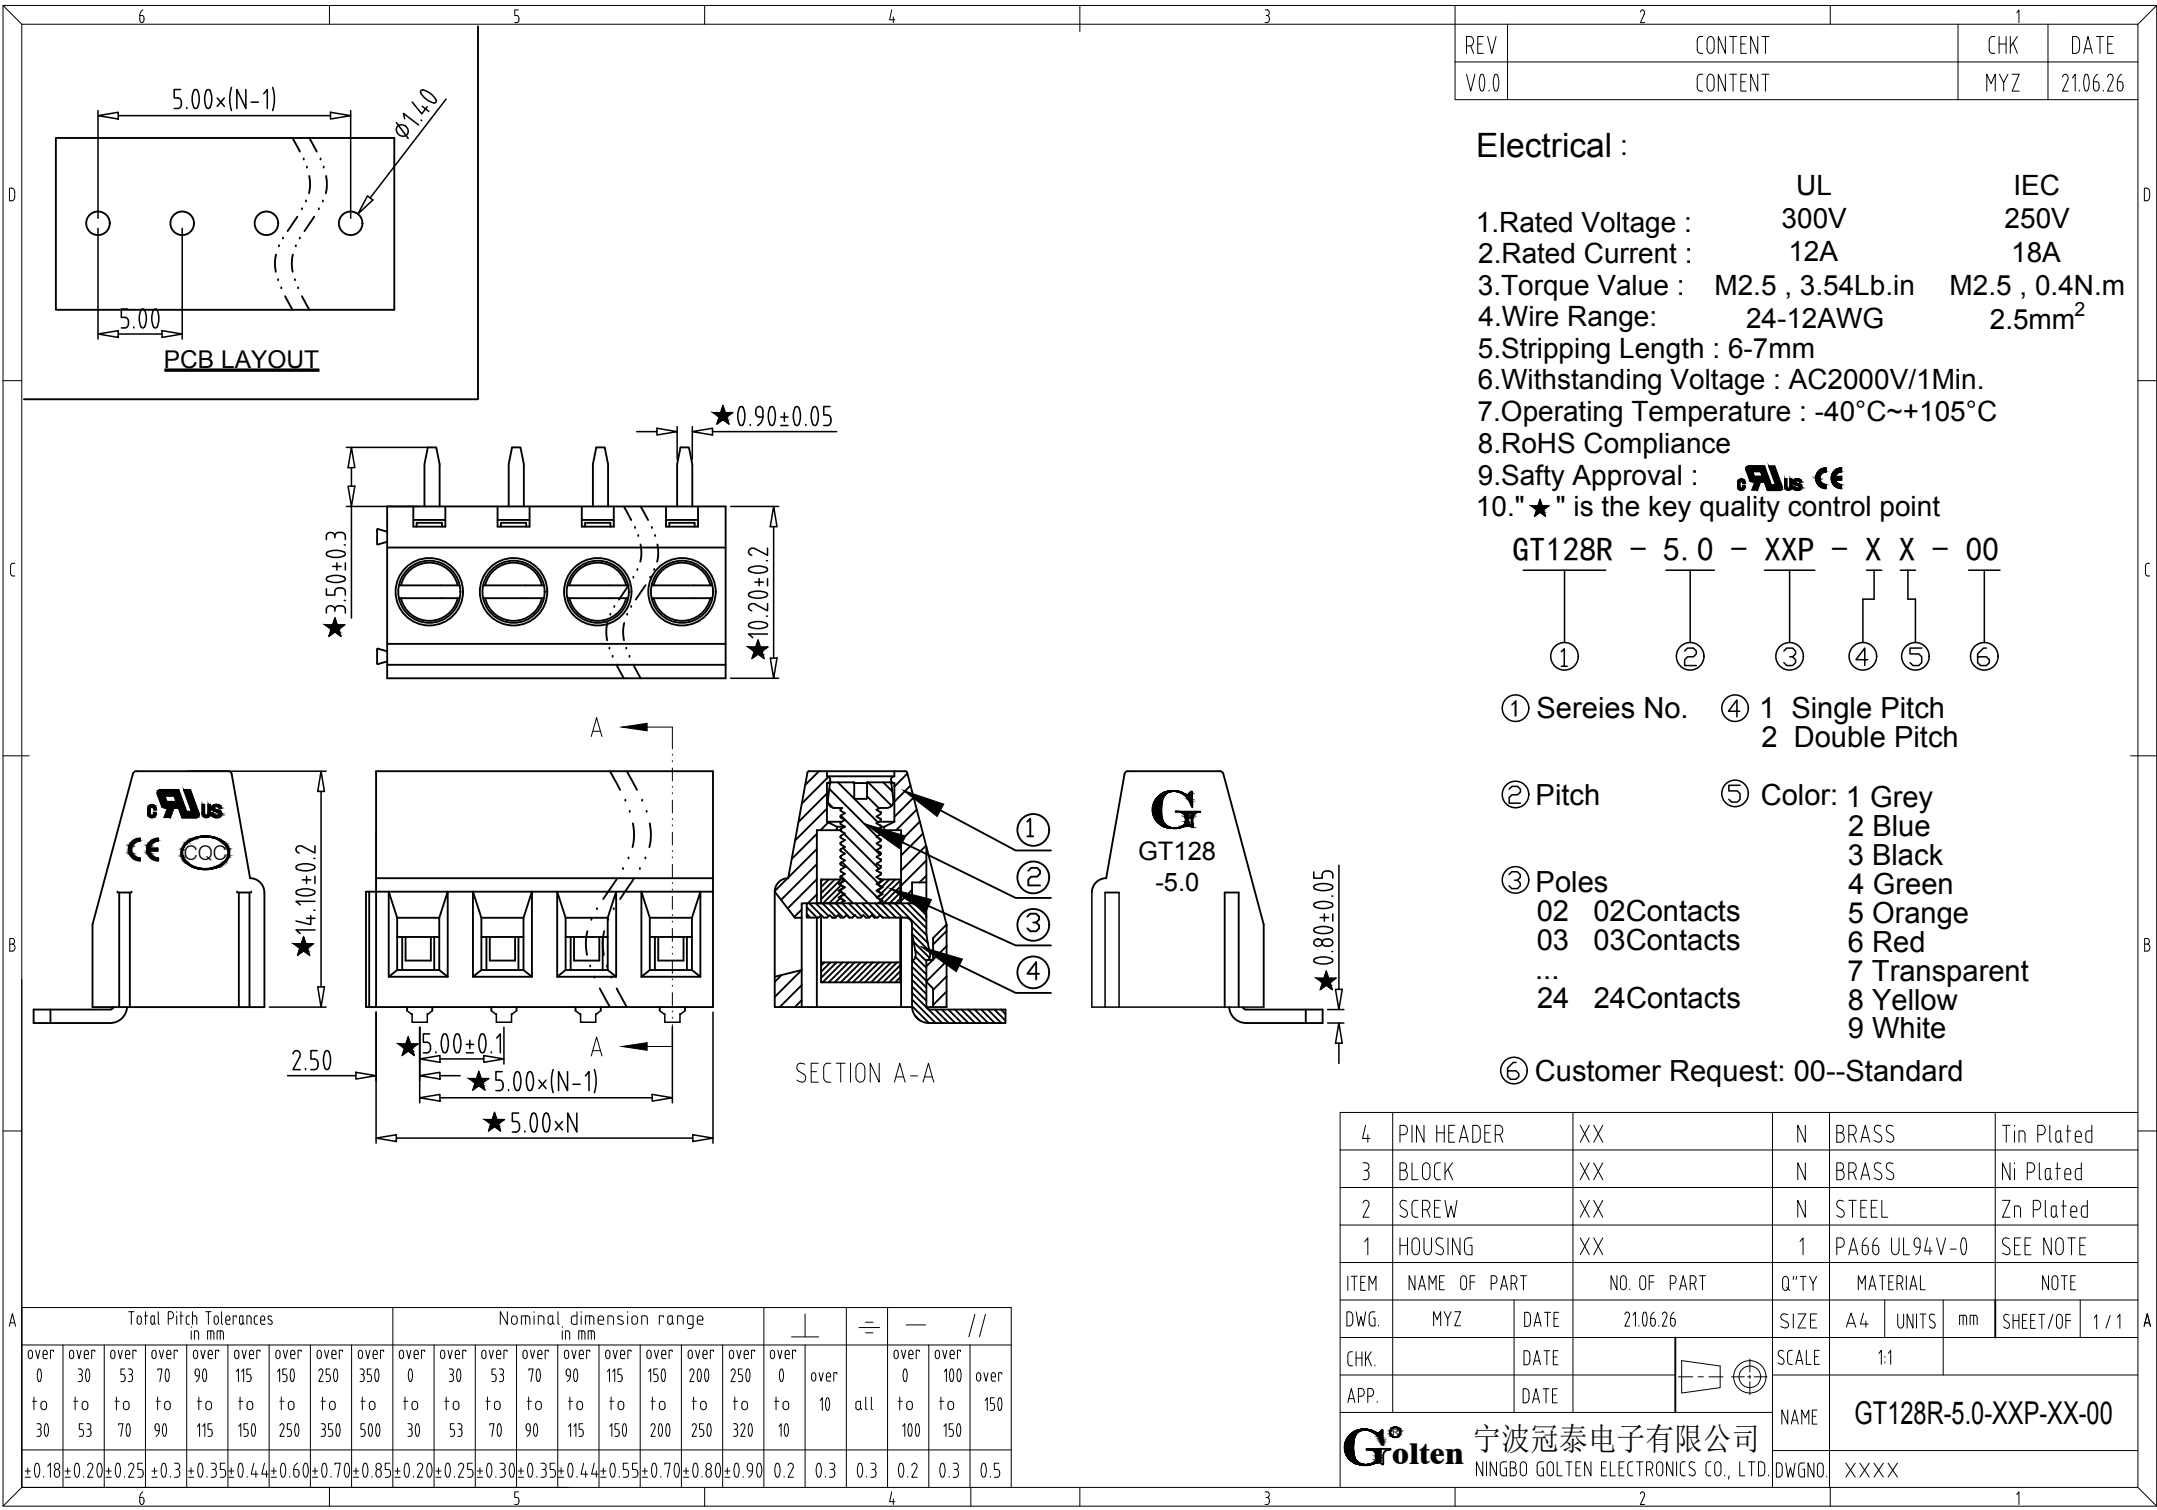

2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.26

Electrical :

- UL

IEC

1.Rated Voltage :

300V

250V

2.Rated Current :

12A

18A

3.Torque Value :

M2.5 , 3.54Lb.in

M2.5 , 0.4N.m

4.Wire Range:

24-12AWG

2.5mm²

5.Stripping Length :

6-7mm

6.Withstanding Voltage :

AC2000V/1Min.


7.Operating Temperature :

-40°C~+105°C

8.RoHS Compliance

9.Safty Approval :

10."★" is the key quality control point

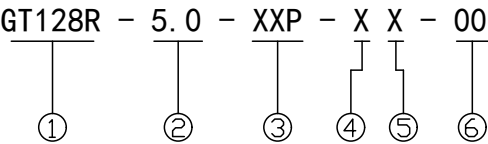

- ① Sereies No.

④ 1 Single Pitch

2 Double Pitch
- ② Pitch

⑤ Color: 1 Grey

2 Blue

3 Black

4 Green

5 Orange

6 Red

7 Transparent

8 Yellow

9 White
- ③ Poles

02 02Contacts

03 03Contacts

... 24 24Contacts
- ⑥ Customer Request: 00--Standard

4	PIN HEADER		XX		N	BRASS		Tin Plated		
3	BLOCK		XX		N	BRASS		Ni Plated		
2	SCREW		XX		N	STEEL		Zn Plated		
1	HOUSING		XX		1	PA66 UL94V-0		SEE NOTE		
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL		NOTE		
DWG.	MYZ	DATE	21.06.26		SIZE	A4	UNITS	mm	SHEET/OF 1 / 1	
CHK.		DATE			SCALE	1:1				
APP.		DATE			NAME	GT128R-5.0-XXP-XX-00				
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					DWNGO.	XXXXX				