

2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.03

Electrical :

	UL	IEC
1.Rated Voltage :	300V	400V
2.Rated Current :	15A	18A
3.Torque Value :	M2.5 , 3.54Lb.in	M2.5 , 0.4N.m
4.Wire Range:	28-12AWG	2.5mm ²
5.Stripping Length :	7-8mm	
6.Withstanding Voltage :	AC1600V/1Min.	
7.Operating Temperature :	-40°C~+105°C	
8.RoHS Compliance		
9.Safety Approval :	ULus CE	
10."★" is the key quality control point		

2EGTKB - 7.62 - XXP - X X - 100





① ② ③ ④ ⑤ ⑥

- ① Series NO. ④ 1 Single Pitch
2 Double Pitch
- ② Pitch ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts



⑥ Customer Request: 100--M2.5-Standard

5	SCREW	XX	P	STEEL	Zn Plated				
4	BLOCK	XX	P	BRASS	Ni Plated				
3	CLAMP	XX	P	BRONZE	Ni Plated				
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE				
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE				
ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL	NOTE			
DWG.	MYZ	DATE	21.07.03	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE		SCALE	1:1				
APP.		DATE							
 宁波冠泰电子有限公司 NINGBO GOLDEN ELECTRONICS CO., LTD.				NAME	2EGTKB-7.62-XXP-XX-100				
				DWGNO.	XXXX				

Golten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

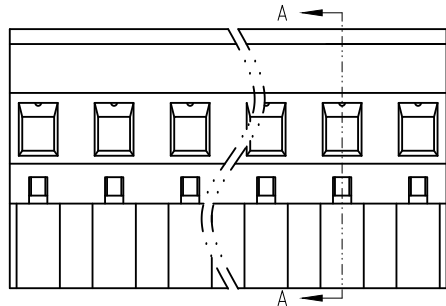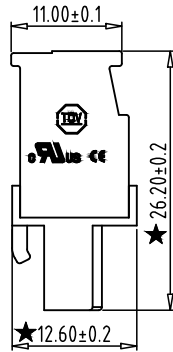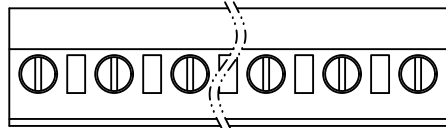

SECTION A-A

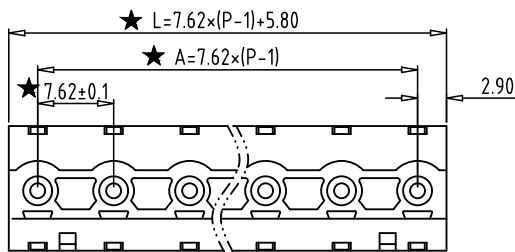

A	Total Pitch Tolerances in mm									Nominal dimension range in mm								$\perp$		$\equiv$	$-$		$//$	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 100		to 150		
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3		0.3	0.2	0.3