


2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.08

Electrical :

- 1.Rated Voltage : 300V
- 2.Rated Current : 15A
- 3.Withstanding Voltage : AC1600V/1Min;
- 4.Operating Temperature : -40°C~+105°C;
5. RoHS Compliance;
- 6.Safty Approval : 
- 7." ★ " is the key quality control point.
- UL 300V
- IEC 320V 10A

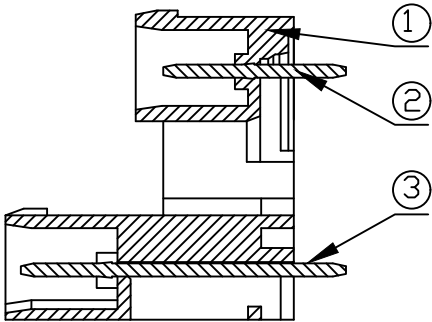



SECTION A-A

2EGTVTC - 5.08 -XXP - X X - 00

① ② ③ ④ ⑤ ⑥

- ① Sereies NO. ④ 1 Single Pitch
2 Double Pitch
- ② Pitch ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ③ Poles
02 02Contacts
03 03Contacts
... 24 24Contacts
- ⑥ Customer Request: 00-- Standard

3	PIN-02	XX	N/2	BRASS	Tin Plated
2	PIN-01	XX	N/2	BRASS	Tin Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.07.08	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	2EGTVTC-5.08-XXP-XX-00
 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.				DWGNO.	XXXXX

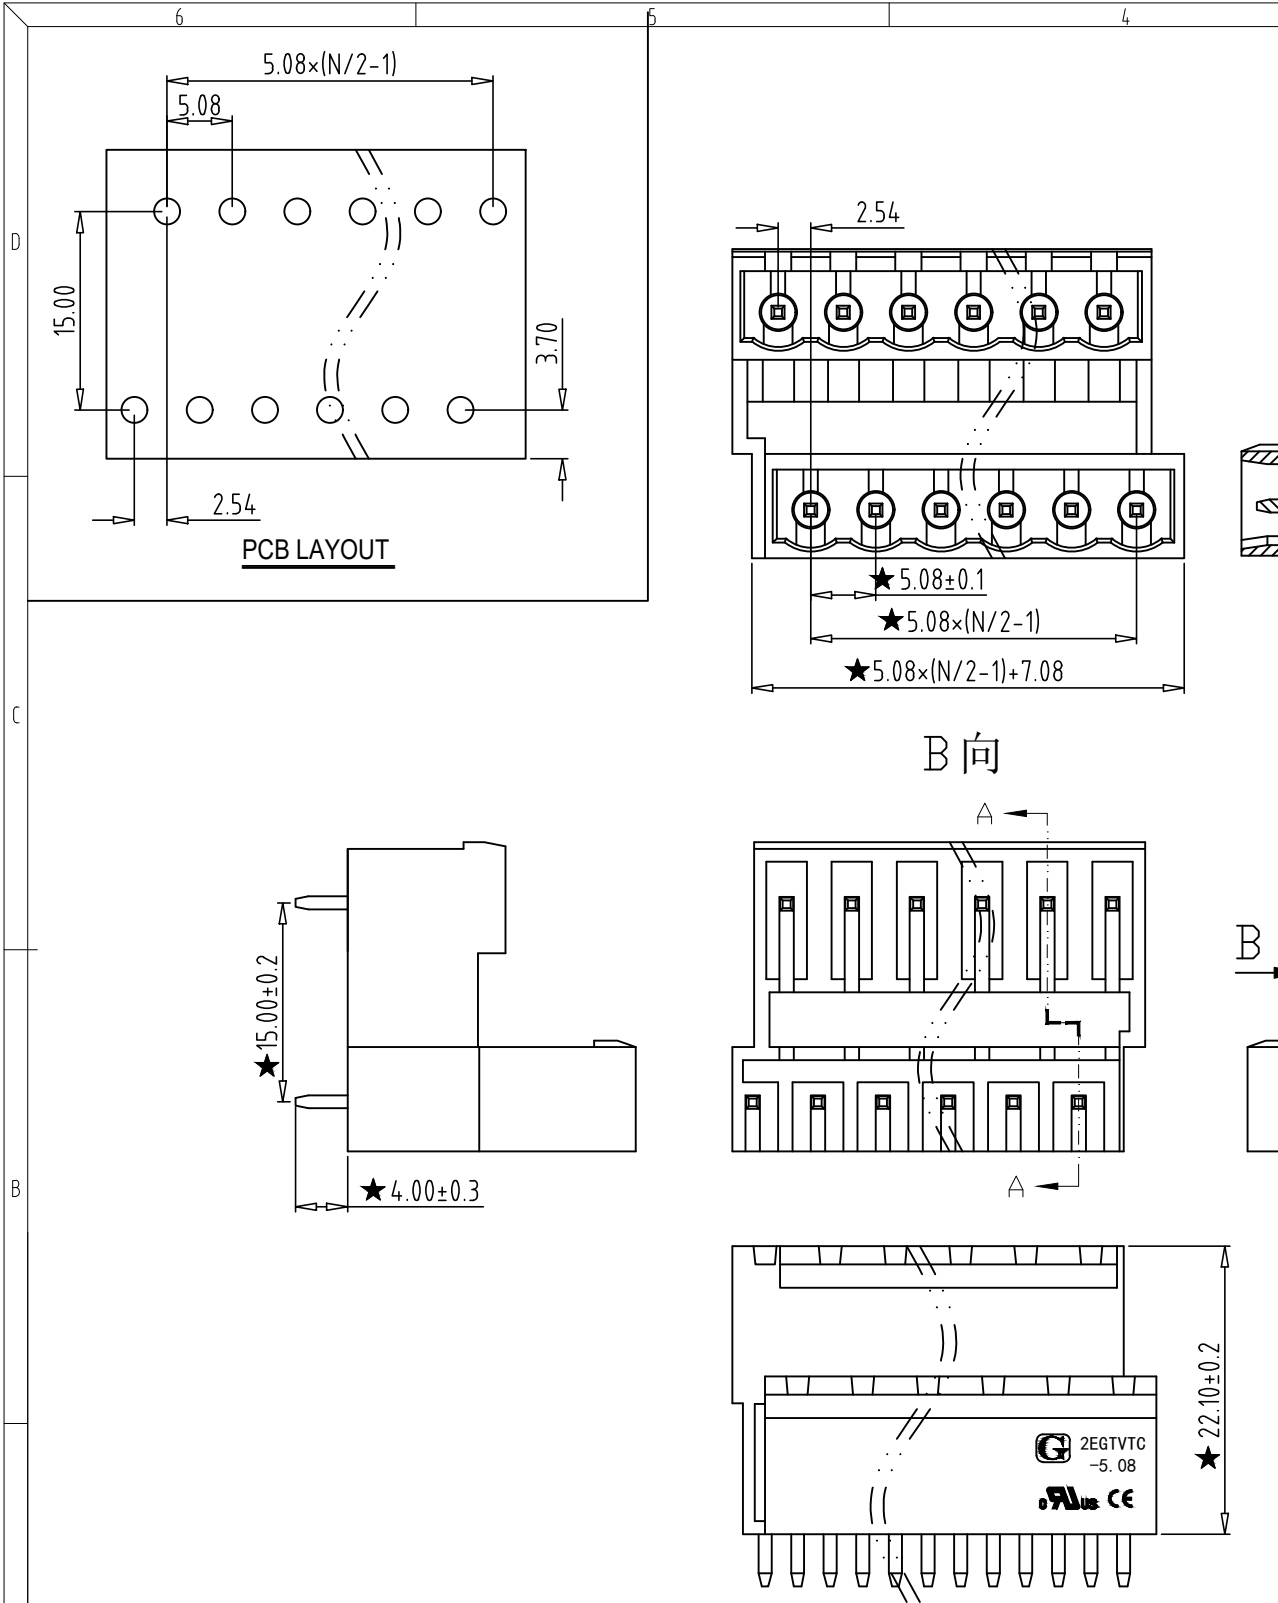

A	Total Pitch Tolerances									Nominal dimension range									$\perp$		$\equiv$	--- //		
	in mm									in mm														
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		over	over	over	
	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over		0	100	over
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to	150
	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10			100	150	
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5