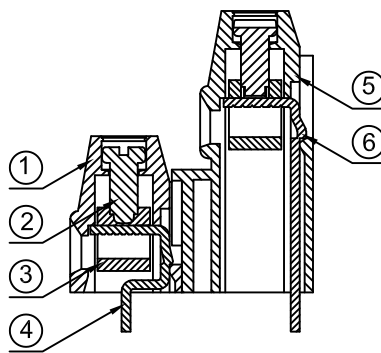
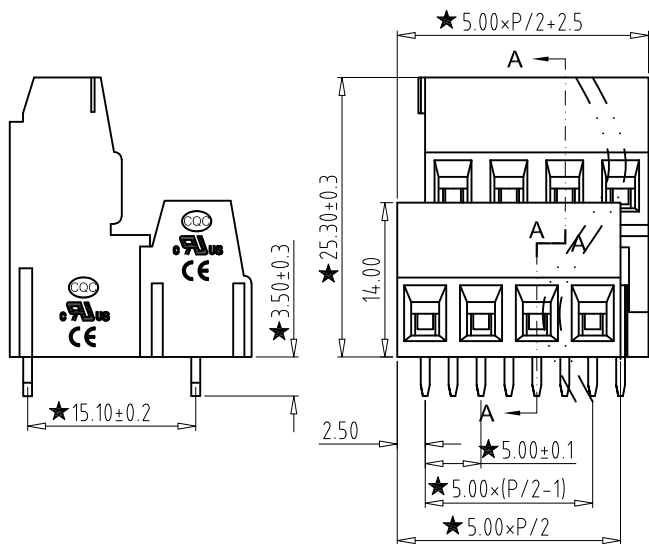

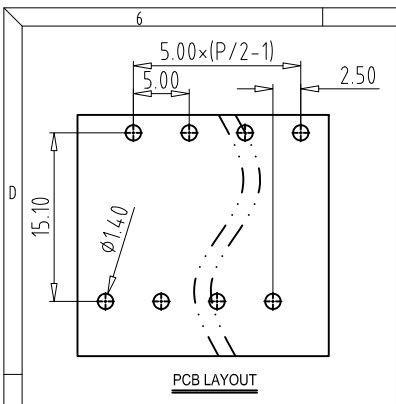


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.01

Electrical :

	UL	IEC
1.Rated Voltage :	300V	250V
2.Rated Current :	20A	24A
3.Torque Value :	M2.5 , 3.54Lb.in	M2.5 , 0.4N.m
4.Wire Range:	28-12AWG	0.5-2.5mm ²
5.Stripping Length :	6-7mm	
6.Withstanding Voltage :	AC2000V/1Min.	
7.Operating Temperature :	-40°C~+105°C	
8.RoHS Compliance		
9.Safty Approval :	ULus CE	
10."★" is the key quality control point.		

GT500B - 5.0 - XXP - X X - 00

① ② ③ ④ ⑤ ⑥

① Sereies No. ④ 1 Single Pitch
2 Double Pitch

② Pitch ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request : 00--Standard

6	PIN 2	XX	P/2	BRASS	Tin Plated
5	HOUSING 2	XX	1	PA66 UL94V-0	SEE NOTE
4	PIN 1	XX	P/2	BRASS	Tin Plated
3	CAGE	XX	P	BRASS	Ni Plated
2	SCREW	XX	P	STEEL	Zn Plated
1	HOUSING 1	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.07.01	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.	DATE			SCALE	1:1
APP.	DATE				
				NAME	GT500B-5.0-XXP-XX-00
				DWGNO.	XXXX

Grolten

宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

A	Total Pitch Tolerances									Nominal dimension range										$\perp$		$\equiv$		$—$		$//$	
	in mm									in mm																	
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150			
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10	to 10	to 100	to 100	to 150			
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5			