


|      |         |     |          |
|------|---------|-----|----------|
| REV  | CONTENT | CHK | DATE     |
| V0.0 | CONTENT | MYZ | 21.07.10 |

Electrical :

- |  |                |                        |
|--|----------------|------------------------|
|  | UL             | IEC                    |
| 1. Rated Voltage :                       | 300V           | 250V                   |
| 2. Rated Current :                       | 8A             | 7A                     |
| 3. Torque Value :                        | M2 , 1.77Lb.in | M2 , 0.2N.m            |
| 4. Wire Range:                           | 28-16AWG       | 0.5-1.5mm <sup>2</sup> |
| 5. Stripping Length :                    | 6-7mm          |                        |
| 6. Withstanding Voltage :                | AC1600V/1Min.  |                        |
| 7. Operating Temperature :               | -40°C~+105°C   |                        |
| 8. RoHS Compliance                       |                |                        |
| 9. Safty Approval :                      | UL CE          |                        |
| 10. "★" is the key quality control point |                |                        |


15EGTKB - 3.5 - XXP - X X - 00



- ① Series No.
- ② Pitch
- ③ Poles  
02 02Contacts  
03 03Contacts  
...  
24 24Contacts
- ④ 1 Single Pitch  
2 Double Pitch
- ⑤ Color: 1 Grey  
2 Blue  
3 Black  
4 Green  
5 Orange  
6 Red  
7 Transparent  
8 Yellow  
9 White

⑥ Customer Request : 00--Standard

|   |              |             |          |                 |                          |
|---|--------------|-------------|----------|-----------------|--------------------------|
| 5   | SCREW        | XX          | P        | STEEL           | Zn Plated                |
| 4   | CLAMP        | XX          | P        | PHOSPHOR BRONZE | Ni Plated                |
| 3   | BLOCK        | XX          | P        | BRASS           | Ni Plated                |
| 2   | COVER        | XX          | 1        | PA66(UL94V-0)   | SEE NOTE                 |
| 1   | HOUSING      | XX          | 1        | PA66(UL94V-0)   | SEE NOTE                 |
| ITEM  | NAME OF PART | NO. OF PART | Q'TY     | MATERIAL        | NOTE                     |
| DWG.  | MYZ          | DATE        | 21.07.10 | SIZE            | A4 UNITS mm SHEET/OF 1/1 |
| CHK.  | DATE         |             |          | SCALE           | 1:1                      |
| APP.  | DATE         |             |          | NAME            | 15EGTKB-3.5-XXP-XX-00    |
| 宁波冠泰电子有限公司<br>NINGBO GOLTEN ELECTRONICS CO., LTD. |              |             |          | DWGNO.          | XXXX                     |

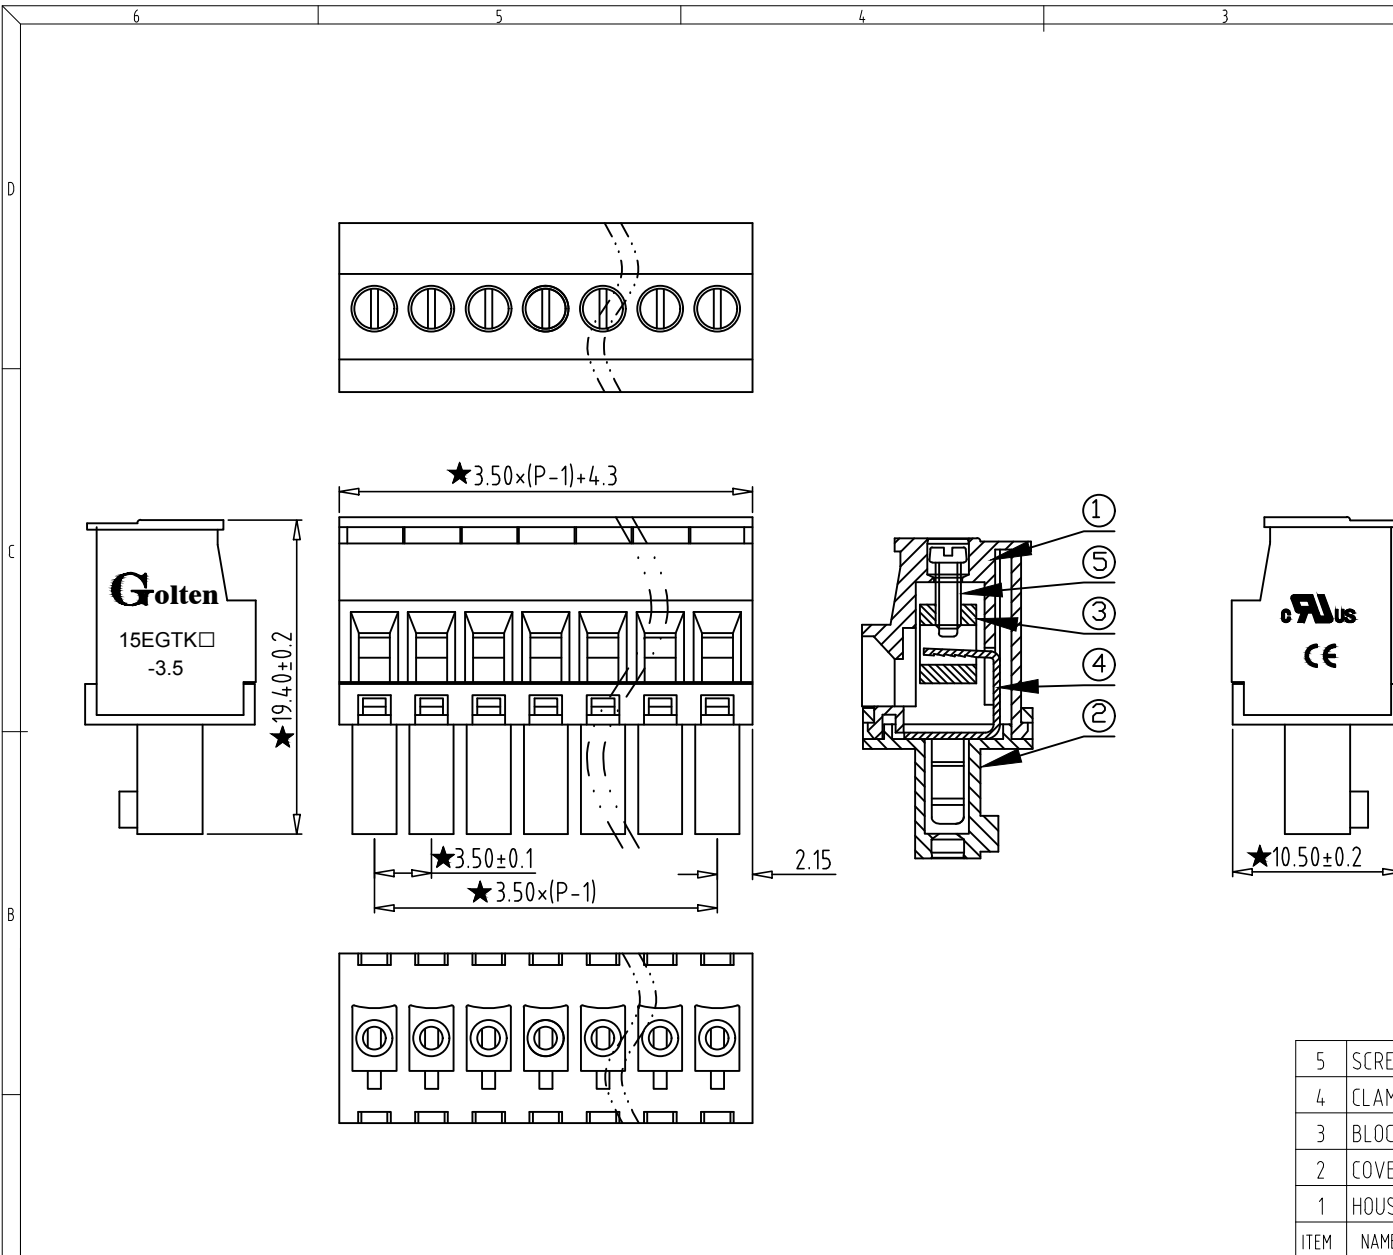

| Total Pitch Tolerances in mm |       |       |      |       |       |       |       |       | Nominal dimension range in mm |       |       |       |       |       |       |       |       | ⊥     | ≡    | -    | //   |      |
|------------------------------|-------|-------|------|-------|-------|-------|-------|-------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|
| over                         | over  | over  | over | over  | over  | over  | over  | over  | over                          | over  | over  | over  | over  | over  | over  | over  | over  | over  | over | over | over | over |
| 0                            | 30    | 53    | 70   | 90    | 115   | 150   | 250   | 350   | 0                             | 30    | 53    | 70    | 90    | 115   | 150   | 200   | 250   | 320   | 0    | 100  | 150  | 150  |
| ±0.18                        | ±0.20 | ±0.25 | ±0.3 | ±0.35 | ±0.44 | ±0.60 | ±0.70 | ±0.85 | ±0.20                         | ±0.25 | ±0.30 | ±0.35 | ±0.44 | ±0.55 | ±0.70 | ±0.80 | ±0.90 | ±1.00 | 0.2  | 0.3  | 0.3  | 0.5  |